



## P6.67 Advertising LED Display 22500dots/ Pixel With Large Viewing Angle

Our Product Introduction


### Basic Information

- Place of Origin: Shenzhen China
- Brand Name: Lecede
- Certification: CE ROHS FCC UL ETL
- Model Number: Q6.67
- Minimum Order Quantity: Negotiation
- Price: Negotiation
- Packaging Details: Wooden case packing, flight case packing , honeycomb case
- Delivery Time: 15~30 days after deposit
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram
- Supply Ability: 10000 /month



### Product Specification

- Product Name: Lecede P6.67 Advertising LED Display Screen
- Pixel Pitch: 6.67MM
- Usage: Outdoor
- Pixel: 22500 Dots/
- Module Size(W\*H): 320x 160 Mm
- LED Lamp: SMD 2727
- Brightness: 6500 Nits
- Refresh Rate:  $\geq 1920$  Hz
- Highlight: digital advertising display screens, led advertising panel

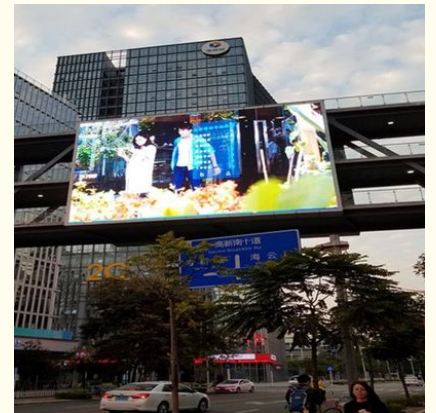

for more products please visit us on [highbrightnessleddisplay.com](http://highbrightnessleddisplay.com)

**P6.67 Advertising LED Display Screen With Large Viewing Angle**

1. With good lightening accordance and no mosaic
2. Led advertising board can play different formats of image files, flash, WAV/MIDI, video signal from TV, video signal from video and other equipment
3. Different video frequency can be changed freely at the same time, and the image can be enlarged and reduced
4. High brightness, and can be adjustable, meets the need of changing requirement of customer in environment

**SPECIFICATION OF Q6.67 Outdoor Advertising LED Display Screen**

Model	Q6.67
Pixel pitch(mm)	6.67
Configuration	SMD 2727
Module dimension(mm)	320x160
Module weight(kg)	0.5
Cabinet dimension(mm)	960x960x120
Pixel density(dots/ )	22500
Flatness error(mm)	≤0.1
Viewing angle	140°/140°(Horizontal/Vertical)
Brightness(cd/ )	6500
Color temperature(K)	5000~9500 (Adjustable)
Contrast	4000:1
Repetition frequency	50/60Hz
Refresh frequency(Hz)	1920
Gray scale	65536
Ave. power(W/ )	350
Max power(W/ )	700
Working temp./humidity	-10~40°C/10%~80%RH
Storing temp./humidity	-20~60°C/10%~85%RH
Cabinet material	Iron/Aluminum
Maintenance	Rear
Protection	IP65/IP65
Driving mode	Constant current driver
Scanning	1/6
Power requirements	AC90~264V, 47~63Hz
Life time(hrs)	100,000

**Advantages Of Outdoor Advertising LED Display Screen**

1. has high refresh rate, high brightness and high contrast which make the screen with no delay and smear phenomenon in direct sunlight.
2. energy saving: low electric current, high-bright lamps, equipped with PFC switching power supply that save 30% electricity.
3. has Wide viewing angle: The horizontal and vertical viewing angles are so wide that it is suitable for wide horizontal.



**Beijing Silk Road Enterprise Management Services Co.,LTD**

☎ 8618888888888

✉ andy@gmail.com

🌐 highbrightnessleddisplay.com

Room 402.Dongbao Building,No.19 Dongbao Road,Songjiang,Shanghai 201613,China